
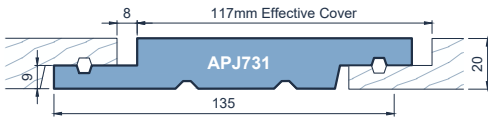




JSC Weatherboard Profiles MicroPro Radiata Pine

VERTICAL WEATHERBOARDS





Vertical Shiplap Weatherboards Square Edges & 6mm Neg Channel

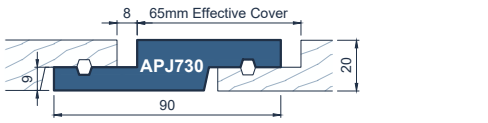

Vertical Shiplap Weatherboards Bevelled Edges & 6mm Neg Channel

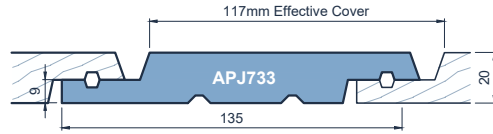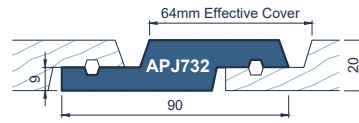


Board & Batten Weatherboards

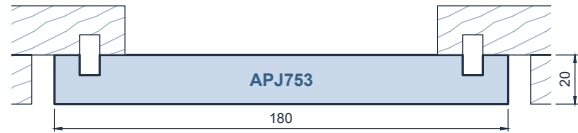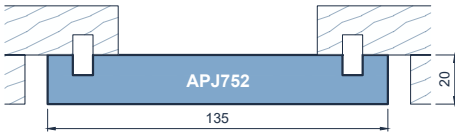


HORIZONTAL WEATHERBOARDS


Traditional Rusticated Weatherboard

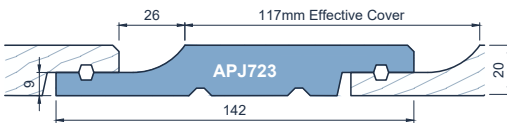


Rusticated Weatherboard Single Groove Rustic - 8mm Channel

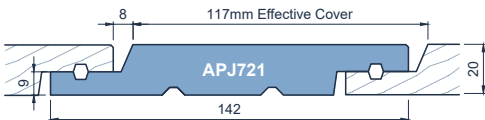



Standard Bevel Back Weatherboard

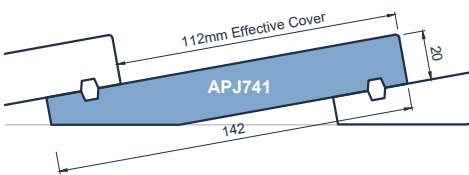

Traditional Rusticated Weatherboard

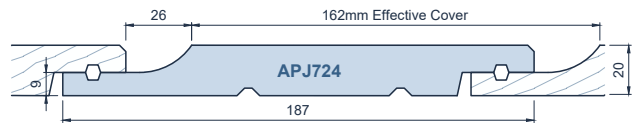

Rusticated Weatherboard Single Groove Rustic - 16mm Channel

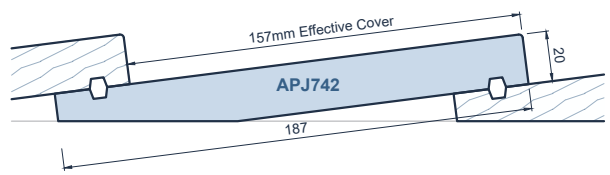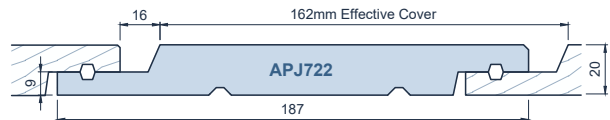

EXTERNAL MOULDING






Scriber



Eaves Mould



Corner Moulding



FIXINGS

316 Stainless Steel, Silicon Bronze or Hot Dipped Galvanised Annular Grooved Nails

Jolt Head



Rose Head



Pentagon Head



Flat Head



IMPORTANT INFORMATION

JSC weatherboards to be installed by suitably qualified and experienced tradesperson in accordance with the chosen cladding specification, installation and maintenance documentation.

Paint with LRV of 45 to be used for weatherboards profiles less than 150 mm wide and LRV 40 for wider profiles is recommended.

Please contact JSC for further information